

**FLUKE®**

**Calibration**



## 6270A Modular Pressure Controller/Calibrator


The simple, easy-to-maintain solution for calibrating a wide range of pressure gauges and sensors





**CAUTION**  
DO NOT DISTURB  
TEST IN PROGRESS  
**CSZ**

**28 PLUS**

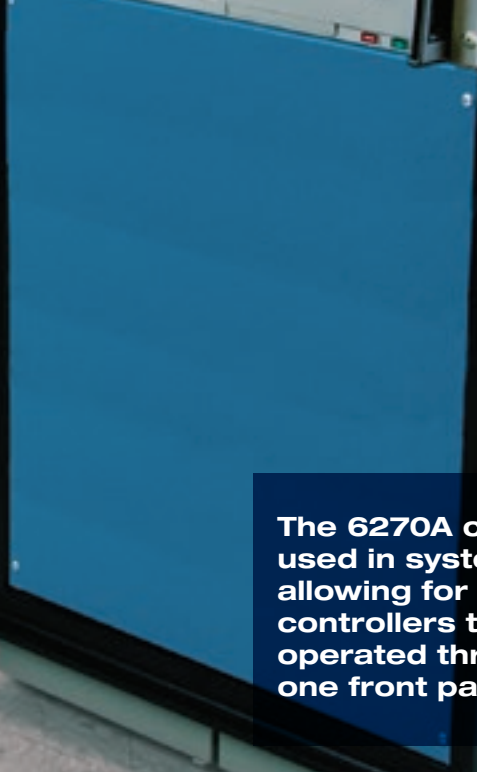

The 6270A can be used in system mode, allowing for multiple controllers to be operated through one front panel.

## 6270A features at a glance

- Calibrate a wide range of gauges and sensors with a single instrument
- Modular configuration makes this a versatile and economical solution
- Easy to operate
- Easy to maintain
- Wide measurement range—vacuum to 20 MPa (3000 psi)
- Two levels of accuracy—0.02 % FS or 0.01 % reading—let you balance accuracy and budget
- High speed, stable pressure control
- Localized graphical user interface in choice of nine languages
- Can be fully automated with COMPASS® for Pressure software
- Optional contamination prevention system helps keep valves clean and free from debris

## Calibrate a wide range of pressure gauges and sensors with this reliable, easy-to-maintain instrument

The Fluke Calibration 6270A Pressure Controller/Calibrator is a robust, reliable solution that lets you dramatically simplify the task of pneumatic pressure calibration. Thanks to its modular design, it is so flexible that it can be configured to meet a wide variety of needs and budgets, and expanded to cover a very broad workload, at purchase or later as your needs change and grow.

The 6270A is ideal for pressure sensor manufacturers who want to avoid downtime on the production line and need a pressure source that performs both quickly and accurately. Its modular design makes it easy to maintain; its high speed control and accuracy over a wide range give them the throughput they require.

Managers and technicians in calibration laboratories and instrument shops appreciate the 6270A

calibrator's control precision and accuracy over a wide pressure range, which enables them to calibrate a wide range of devices with a single calibrator. They also like the contamination prevention option that provides an important safeguard against that pervasive hazard.

The 6270A is easy to learn and use, thanks to a graphical user interface and an intuitive hardware design.



**The 6270A works as a benchtop or rack-mounted solution.**



# 6270A overview

The large main display enables you to easily view and edit important information.

Make minor adjustments to the pressure using the Jog Wheel, ideal for calibration of analog dial gauges.

A simple, calculator-style keyboard makes it easy to enter values quickly.



Real time graph makes it easy to see pressure stability or procedure status.

The touch screen display in choice of ten languages features an easy-to-read, intuitive menu structure that lets you access any feature within four button presses or less.

Front panel abort button allows for fast venting in emergency situations.



To access the measurement and control modules, simply open the front panel. Modules are easy to replace, even when the 6270A is rack-mounted.


Switch Testing—6270A has built-in ability to read the state of a pressure switch allowing for closed loop testing of pressure switches.

System mode allows multiple units to be connected together, providing the ultimate in rangeability.

External valve drivers enable users to create fully automated custom systems and operate accessories like the optional Contamination Prevision System (CPS).


USB Connection

Ethernet

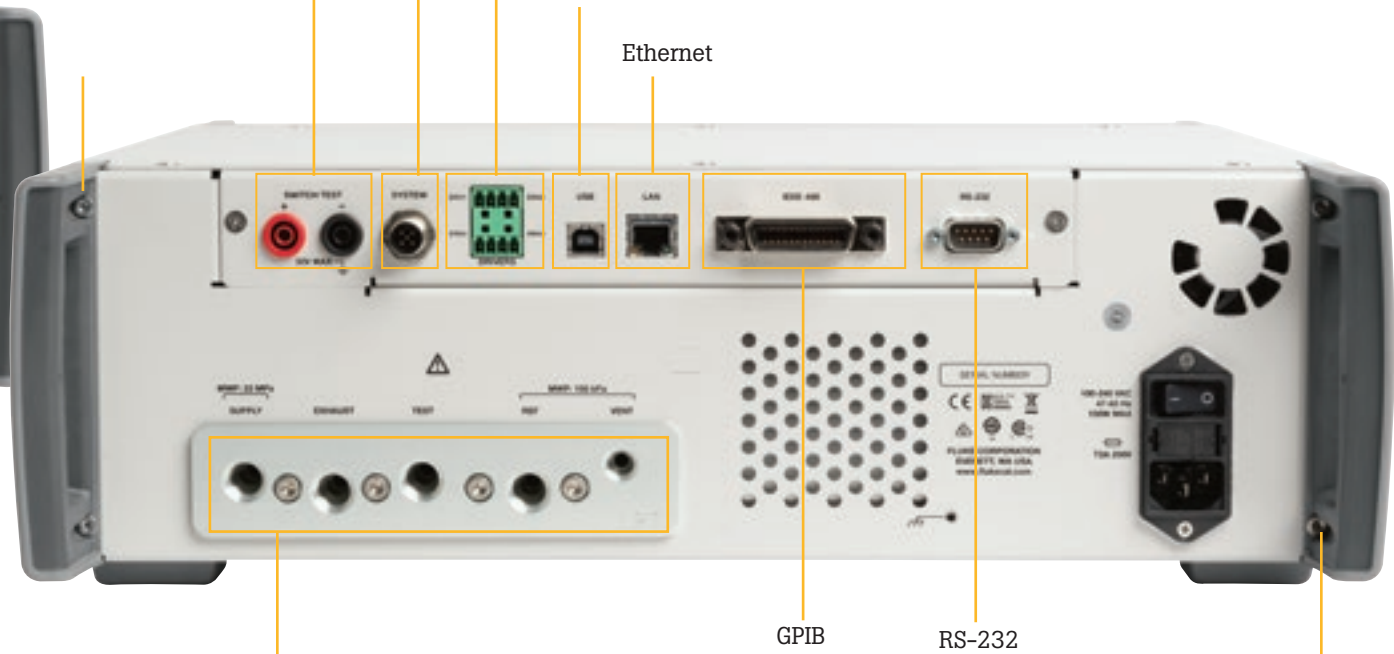

All pressure connections are located on a single, easily replaceable manifold block. Connectors in NPT, BSP, or 7/16-20 SAE enable you to choose the most popular fitting type for your region.

An optional rack-mount kit enables the 6270A to be installed in a standard 19-inch rack.

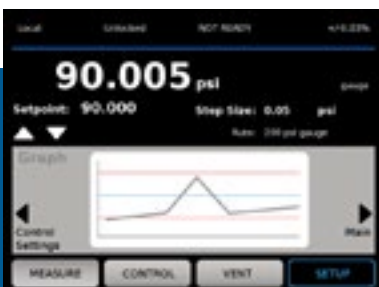

Real time graph makes it easy to see pressure stability or procedure status.



Built-in leak testing simplifies the process for validating system integrity.



User-selectable choice of languages.



Hook up to five measurement modules.

### **Calibrate a wide workload—quickly, accurately, dependably**

The 6270A features pressure ranges from low differential pressure to 20 MPa (3000 psi), which covers the requirements of most gauges and sensors. Two levels of accuracy, 0.02 % FS or 0.01 % reading, let you balance your need for accuracy with the limits of your budget.

Thanks to its modular design, the 6270A is flexible enough that you can install modules with different accuracy classes within the same chassis. You can buy the highest level of accuracy for the pressure ranges that require it and a lower, more economical level of accuracy for everything else.

The 6270A's accuracy specifications are provided in full and supported by a Technical Note that details its measurement uncertainty, so

you know exactly what you are getting. The Technical Note is available for download on the [flukecal.com](http://flukecal.com) website. As with all Fluke Calibration instruments, these specifications are conservative, complete, and dependable.

### **Cutting edge technology and performance**

The PM600 Pressure Measurement Modules use the Fluke Calibration Quartz Reference Pressure Transducer (Q-RPT) technology to provide 0.01 % reading

measurement uncertainty from 30 % to 100 % of the modules span. The modules are available in 14 different ranges including modules that are inherently absolute mode and gauge mode. The absolute mode modules include an onboard barometer. The barometer provides dynamic compensation of changes in atmospheric pressure, allowing for the modules usage in both absolute and gauge mode. The wide percent of reading capability combined with its ability to measure both gauge and absolute gives the PM600 Pressure Measurement Module the ability to cover an extremely wide workload.

The PM200 Pressure Measurement Modules use a highly characterized silicon pressure sensor to provide an economical method of making accurate pressure measurements. The 0.02 % FS specification includes the short term performance of the module (linearity, hysteresis, and repeatability) as well as its long term stability and the uncertainty of the calibration standard. Users can be confident in the PM200 measurement performance.

### **Wide rangeability assures wide workload coverage**

The Pressure Control Module can handle a wide range of pressures.

The 6270A features pulse-width-modulated control, a proven technology that enables it to deliver wide rangeability, the ratio of the maximum to the minimum specified measured value at which the instrument performs correctly. A wide rangeability is what enables you to calibrate a wide workload.

### **Safety features protect operators and instruments**

Each measurement and control module, as well as the main chassis, has pressure relief valves to protect the instrument and its operators from accidental overpressure. The 6270A has been designed using Sound Engineering Practices (SEP). With the internal relief valves, user-setable pressure limits, and emergency abort button, safety is the highest priority.

### **Preventing contamination**

If your workload includes devices that contain different substances like water, oil, and gas, you could be at risk for contamination—something getting into your system that isn't supposed to be there. Contamination can clog a calibrator's valves, wear out its parts, and make it difficult to maintain pressure. If the contamination gets into the sensor, it can actually change the calibrator's behavior and throw off your readings. If contamination is a concern for you, order the optional 6270A Contamination Prevention System (CPS) to help keep the calibrator's valves clean and free from debris.

The CPS provides an unprecedented level of protection by maintaining uni-directional flow away from the controller, a gravity sump system, and a two-stage filtering system.

Mix and match modules to balance accuracy and economy.

Change modules in about 20 seconds.

### **Modular configuration gives you almost unlimited flexibility**

Install up to five pressure modules in a single 6270A chassis, mixing and matching module types and ranges to get the combination that best suits your needs. Buy just what you need to calibrate the pressure ranges in your current workload. Add modules later

as your workload grows and changes.

Modules snap in and out quickly and easily; just slide each one into a specially-designed track and tighten the knob until you hear it click into

place. The click tells you that the module is safely in place; a special "anti-torque" guard on the knob prevents over-tightening. You never have to wonder if you tightened it too much or not enough.

Modules are installed and uninstalled through the front of the chassis. You can easily install and remove both the measurement modules and the control module from the chassis, even if the 6270A is installed in a rack mount.

Each module uses an enhanced face-seal design that has been leak tested to pressures that are three times higher than the maximum working pressure. You don't have to worry about a leak in the system affecting your ability to measure and control pressure.

You'll always know when a module is properly installed.

### **So easy to maintain, you can do it in house**

We designed the 6270A to be easy to maintain, making your cost of ownership very reasonable. We publish a Service and Calibration Manual with detailed instructions on how to replace valves and components. An on-board screen capture routine can be used for troubleshooting help.

Control and measurement modules are separate, allowing for quick and easy repair. Just pull out the module and replace it; no auto-tuning required. You can change the pressure ranges just as easily by installing a new module and possibly changing the supply pressure. No need to send the 6270A back to the factory.

The modules can be calibrated inside or outside of the chassis using the optional PMM Calibrator Kit. Once calibrated, you can use them in any 6270A chassis without impacting the uncertainty of your measurements. Modules can be removed and replaced, easily; no specialized tools required.

Every component in the system is designed for simple, modular replacement, from the front panel to the rear pressure connections.

The main CPU board is located on top of the 6270A. You can replace it just by removing a handful of screws.

The pressure connectors on the back of the 6270A are made from anodized aluminum, a robust material that stands up well to normal usage. However, if threads are stripped or there is galling from metal connectors sliding against it, you can easily remove the block without having to open the chassis. Simply remove the screws holding it in place and pull it out. The block does not have any items attached to it, so replacement is simple and low cost.

The removable rear manifold makes it easy to remove the 6270A from a rack-mounted system. Simply vent the test and supply ports and disconnect the connection manifold from the back of the chassis. You won't need to question which pressure line is the supply port and which one is the test port; they stay connected to the manifold, and the manifold can only be connected one way. Three types of manifolds—NPT, BSP, and 7/16-20—are available to meet the needs of different geographic regions. The isolation valves on the main manifolds are easily removed from the top of the 6270A chassis.





# Automation, training and support

## Automate with COMPASS® software for improved consistency and throughput

Fluke Calibration COMPASS for Pressure software is designed specifically for pressure calibration. It enables you to automate the 6270A and run complete pressure calibration sequences on single or multiple devices under test (DUTs). COMPASS software removes the unknowns often associated with getting automated systems online.

The 6270A also features a full remote interface that enables you to use it with custom software or other data acquisition equipment. Details about the interface are provided in the 6270A User Manual.

## If you need support, we're here to help

Fluke Calibration's testing, repair and calibration services are dedicated to filling your needs quickly and at a fair cost while maintaining the unmatched level of quality that is our trademark. Our pressure calibration laboratories are accredited by the American Association for Laboratory Accreditation (A2LA) for conformance to ISO Guide 17025. We maintain global calibration and repair facilities to help you keep your hardware in top working order.

## CarePlans help you manage cost of ownership

Reduce downtime and control your cost of ownership with a CarePlan. Fluke Calibration offers one-year, three-year and five-year Priority Gold CarePlans, which feature an annual standard or accredited calibration of your 6270A calibrator with guaranteed three-day in-house turnaround<sup>1</sup>, plus free repairs with guaranteed ten-day in-house repair (includes calibration).

Two-year and four-year Silver CarePlans are available for those customers who only want extended warranty coverage.

## A range of training options get you up and running quickly

We sponsor a range of pressure and flow calibration courses in our Phoenix, Arizona facility in the United States. We also host periodic web seminars at no charge on a wide variety of pressure calibration topics. If you need service or maintenance training to help you maintain your fleet of pressure controllers, we can help you there, too.

<sup>1</sup>. Three-day in-house turnaround not available in all countries; contact your local Fluke Calibration representative for details. Priority shipping times vary by country.



|  <b>Gold CarePlans</b> |  <b>Silver CarePlans</b> |
|--|---|
| Annual calibration   | Extended warranty coverage beyond original factory warranty   |
| Free repairs with guaranteed turnaround time   | Calibration included on repair  |
| Pre-paid priority freight on return of instrument  | Free product updates performed at time of repair  |
| Priority Gold telephone help line  | Discounts on regular calibrations and out-of-plan service charges   |
| Free product updates   |   |
| Discounts on product upgrades  |   |
| Discounts on training  |   |





# Summary Specifications

| General specifications  |  |
|---|--|
| Power requirements  | 100 V ac to 240 V ac, 47 Hz to 63 Hz   |
| Fuse  | T2A 250 V ac   |
| Max power consumption   | 100 W  |
| Operating ambient temperature range   | 15 °C to 35 °C   |
| Storage temperature   | -20 °C to 70 °C  |
| Relative humidity   | Operating: <80 % to 30 °C, <70 % to 40 °C, <40 % to 50 °C  |
|   | Storage: <95 %, non-condensing. A power stabilization period of four days may be required after extended storage at high temperature and humidity. |
| Vibration   | MIL-T-28800  |
| Altitude (operation)  | <2000 m  |
| Ingress protection  | IEC 60529: IP20  |
| Safety  | IEC 61010-1, Installation Category II, Pollution degree 2  |
| Weight (Chassis only)   | 13 kg (28.5 lbs)   |
| Dimensions  | Height: 147 mm (5.78 in)   |
|   | Width: 454 mm (17.79 in)   |
|   | Depth 488 mm (19.2 in)   |
| Rack mount dimensions   | 3U-19 inch rack  |
| Warm up time  | 15 minutes typical   |
| Control specifications  |  |
| Control precision (dynamic mode)  | 0.001% range   |
| Control turndown  | 10:1 (typical)   |
| Low control point   | 1 kPa (0.15 psi) absolute  |
| Supply pressure requirements  |  |
| Clean dry N <sub>2</sub> or air – Industrial grade nitrogen, 99.5 %+  |  |
| Particulate contamination   | ≤ 1.25 micrometer (50 microinches)   |
| Maximum moisture content  | -50 °C dew point   |
| Maximum hydrocarbon content   | 30 ppm   |
| Vacuum supply requirements (when operating near or sub-atmospheric)   |  |
| >50 liters per minute capacity with Auto Vent feature   |  |
| Appropriate protections for High Pressure Gauge work system exhaust gas will pass through the Vacuum supply system. |  |
| Interface/communications  |  |
| Primary remote interfaces   | IEEE, Ethernet, RS232, USB   |
| System connection   | Supports interconnection of two or three systems   |
| Switch test connection  | Standard 4 mm jack:<br>Nominal 24 v dc isolated drive<br>Maximum 30 V dc w.r.t. chassis ground   |
| Aux drivers   | 4 external solenoid drivers<br>24 V dc drive (maximum drive 6 W continuous per channel)  |

| Model         | Gauge mode range (SI units) | Absolute mode range (SI units) | Gauge mode range (Imperial units) | Absolute mode range (Imperial units) | Relative uncertainty (% Reading) | Threshold uncertainty (% Span) | Absolute mode adder (% Full scale) |
|---------------|-----------------------------|--------------------------------|-----------------------------------|--------------------------------------|----------------------------------|--------------------------------|------------------------------------|
| PM600-BG15K   | -15 to 15 kPa               | -                              | -60 to 60 inH <sub>2</sub> O      | -                                    | 0.01 %                           | 0.003 %                        | -                                  |
| PM600-G100K   | 0 to 100 kPa                | -                              | 0 to 15 psi                       | -                                    | 0.01 %                           | 0.003 %                        | -                                  |
| PM600-G200K   | 0 to 200 kPa                | -                              | 0 to 30 psi                       | -                                    | 0.01 %                           | 0.003 %                        | -                                  |
| PM600-A100K   | -100 to 0 kPa               | 6 to 100 kPa                   | -13.8 to 0 psi                    | 0.9 to 15 psi                        | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A200K   | -90 to 100 kPa              | 10 to 200 kPa                  | -13.2 to 15 psi                   | 1.5 to 30 psi                        | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A350K   | -90 to 250 kPa              | 10 to 350 kPa                  | -13.2 to 35 psi                   | 1.5 to 50 psi                        | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A700K   | -82 to 700 kPa              | 18 to 700 kPa                  | -12.1 to 100 psi                  | 2.6 to 100 psi                       | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A1.4M   | -0.065 to 1.4 MPa           | 0.035 to 1.4 MPa               | -10 to 200 psi                    | 5 to 200 psi                         | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A2M     | -0.03 to 2 MPa              | 0.07 to 2 MPa                  | -5 to 300 psi                     | 10 to 300 psi                        | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A3.5M   | -0.03 to 3.5 MPa            | 0.07 to 3.5 MPa                | -5 to 500 psi                     | 10 to 500 psi                        | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A7M     | 0 to 7 MPa                  | atmosphere to 7 MPa            | 0 to 1000 psi                     | atmosphere to 1000 psi               | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A10M    | 0 to 10 MPa                 | atmosphere to 10 MPa           | 0 to 1500 psi                     | atmosphere to 1500 psi               | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A14M    | 0 to 14 MPa                 | atmosphere to 14 MPa           | 0 to 2000 psi                     | atmosphere to 2000 psi               | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| PM600-A20M    | 0 to 20 MPa                 | atmosphere to 20 MPa           | 0 to 3000 psi                     | atmosphere to 3000 psi               | 0.01 %                           | 0.003 %                        | 0.007 %                            |
| BRM600-BA100K | -                           | 70 to 110 kPa                  | -                                 | 10 to 16 psi                         | 0.01 %                           | -                              | -                                  |

\* Uncertainty is the Instrumental Measurement Uncertainty (95%) and includes precision (linearity, hysteresis, and repeatability), temperature effects, 1 year stability, and reference uncertainty.

\*\* Gauge mode uncertainty is the greater of the relative uncertainty and the threshold uncertainty.

\*\* Absolute mode uncertainty is the greater of the relative uncertainty and the threshold uncertainty plus the absolute mode uncertainty adder for the lowest range PM600-AXXX module installed. For example, if a PM600-A200K and a PM600-A2M, the uncertainty at 2000 kPa absolute would be 0.2 kPa (0.01 % \* 2000 kPa) plus 0.014 kPa.

| Model        | Range (SI units) | Range (Imperial units)       | Measurement mode | Uncertainty (%FS) |
|--------------|------------------|------------------------------|------------------|-------------------|
| PM200-BG2.5K | -2.5 to 2.5 kPa  | -10 to 10 inH <sub>2</sub> O | gauge            | 0.20 %            |
| PM200-BG35K  | -35 to 35 kPa    | -5 to 5 psi                  | gauge            | 0.05 %            |
| PM200-BG40K  | -40 to 40 kPa    | -6 to 6 psi                  | gauge            | 0.05 %            |
| PM200-A100K  | 2 to 100 kPa     | 0.3 to 15 psi                | absolute         | 0.10 %            |
| PM200-BG100K | -100 to 100 kPa  | -15 to 15 psi                | gauge            | 0.02 %            |
| PM200-A200K  | 2 to 200 kPa     | 0.3 to 30 psi                | absolute         | 0.10 %            |
| PM200-BG200K | -100 to 200 kPa  | -15 to 30 psi                | gauge            | 0.02 %            |
| PM200-BG250K | -100 to 250 kPa  | -15 to 36 psi                | gauge            | 0.02 %            |
| PM200-G400K  | 0 to 400 kPa     | 0 to 60 psi                  | gauge            | 0.02 %            |
| PM200-G700K  | 0 to 700 kPa     | 0 to 100 psi                 | gauge            | 0.02 %            |
| PM200-G1M    | 0 to 1 MPa       | 0 to 150 psi                 | gauge            | 0.02 %            |
| PM200-G1.4M  | 0 to 1.4 MPa     | 0 to 200 psi                 | gauge            | 0.02 %            |
| PM200-G2M    | 0 to 2 MPa       | 0 to 300 psi                 | gauge            | 0.02 %            |
| PM200-G2.5M  | 0 to 2.5 MPa     | 0 to 360 psi                 | gauge            | 0.02 %            |
| PM200-G3.5M  | 0 to 3.5 MPa     | 0 to 500 psi                 | gauge            | 0.02 %            |
| PM200-G4M    | 0 to 4 MPa       | 0 to 580 psi                 | gauge            | 0.02 %            |
| PM200-G7M    | 0 to 7 MPa       | 0 to 1000 psi                | gauge            | 0.02 %            |
| PM200-G10M   | 0 to 10 MPa      | 0 to 1500 psi                | gauge            | 0.02 %            |
| PM200-G14M   | 0 to 14 MPa      | 0 to 2000 psi                | gauge            | 0.02 %            |
| PM200-G20M   | 0 to 20 MPa      | 0 to 3000 psi                | gauge            | 0.02 %            |

\* Gauge mode modules (PM200-GXXX or PM200-BGXXX) with ranges of 100 kPa (15 psi) or greater will support absolute mode measurement when used with a Barometric Reference Module.

\*\* Uncertainty is the Instrumental Measurement Uncertainty (95 %) and includes precision (linearity, hysteresis, and repeatability), temperature effects, one year stability, and reference uncertainty.

\*\*\* Uncertainty for gauge mode modules assumes routine zeroing. Uncertainty for absolute mode modules includes one year zero stability. If routinely zeroed, uncertainty is 0.05 % FS

\*\*\*\* Instrumental Measurement Uncertainty for gauge mode modules used in absolute mode by addition of a barometric reference module is calculated as the uncertainty of the gauge mode module plus the uncertainty of the barometric reference module.



## Ordering Information

### Models

|            |   |
|------------|---|
| 6270A-NPT  | Modular Pressure Controller Chassis, NPT Manifold         |
| 6270A-BSP  | Modular Pressure Controller Chassis, BSP Manifold         |
| 6270A-7/16 | Modular Pressure Controller Chassis, SAE 7/16-20 Manifold |

### Control modules

|             |  |
|-------------|--|
| PCM-STD-20M | Pressure Control Module, Standard Turndown |
|-------------|--|

### Pressure modules

Please refer to the Summary Specifications for details about the pressure measurement modules.

### Accessories

|                    |  |
|--------------------|--|
| RMK-19IN-3U        | Rack Mount Kit, 19 in width, 3U                                |
| CASE-6270          | Shipping Case, 6270A   |
| CASE-PMM           | Shipping Case, 3 PMM Modules                                   |
| PK-6270-NPT        | Lines and Fittings Kit, 6270A NPT                              |
| PK-6270-BSP        | Lines and Fittings Kit, 6270A BSP                              |
| PMM-CAL-KIT-20M    | Pressure Measurement Module Calibration Kit, 20 MPa (3000 psi) |
| CPS-20M            | Contamination Prevention System 20 MPa (3000 psi)              |
| TST-20M            | Test Station, 20 MPa (3000 psi)                                |
| VA-PPC/MPC-REF-110 | Vacuum Pump Package, 110 V                                     |
| VA-PPC/MPC-REF-220 | Vacuum Pump Package, 220 V                                     |

## The broadest range of calibration solutions

Fluke Calibration provides the broadest range of calibrators and standards, software, service, support and training in electrical, temperature, pressure, RF and flow calibration.

Visit **[www.flukecal.com](http://www.flukecal.com)** for more information about Fluke Calibration products and services.



The Contamination Prevention System acts as a test stand for connecting units under test, as well as for preventing contamination from reaching the 6270A.

**Fluke Calibration.** *Precision, performance, confidence.™*

|            |    |             |          |      |          |
|------------|----|-------------|----------|------|----------|
| Electrical | RF | Temperature | Pressure | Flow | Software |
|------------|----|-------------|----------|------|----------|

**Fluke Calibration**  
PO Box 9090,  
Everett, WA 98206 U.S.A.

**Fluke Europe B.V.**  
PO Box 1186, 5602 BD  
Eindhoven, The Netherlands

#### For more information call:

In the U.S.A. (877) 355-3225 or Fax (425) 446-5116  
In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222  
In Canada (800)-36-FLUKE or Fax (905) 890-6866  
From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116  
Web access: <http://www.flukecal.com>

©2014 Fluke Calibration. Specifications subject to change without notice.  
Printed in U.S.A. 11/2014 6002251a-en

Pub-ID 13268-eng

**Modification of this document is not permitted without written permission from Fluke Calibration.**